

ACCESSRAILER

by REXQUOTE

Genie Access 225

The Genie Z60/34 (225kg) AccessRailer has a working height of 20 metres and a maximum outreach of 10.5 metres at 9 metres high. The 2.4 m by 0.9 m platform can carry two people plus tools and has a capacity of 225 kg.

The Genie AccessRailer can be travelled and controlled from the basket. The on-rail speed with the basket stowed is 14 kph and 2.3 kph when in use, i.e. when the basket is elevated. The machine can tow up to 500 kg and Rexquote have developed a special lightweight two wheeled trailer (T12) uniquely designed to work with the Genie making it even more versatile.

Safety features include an Emergency Descent System, emergency stop, tilt alarm and automatic basket levelling. The machine is CE marked and has been independently tested and approved to EN280. It is fully compliant with RIS1530 PLT.

Download our Product Datasheet



ACCESSRAILER BY REXQUOTE



The Genie Access Railer is the latest model in Rexquote's comprehensive range of access equipment.

The Genie 20254 Access Railer has a working height of 22.5 metres and an outreach of 10 metres. The 3.0m by 0.7m wide platform can carry two people plus tools and has a capacity of 225 kg. The Genie Access Railer can be controlled and controlled from the basket.

The unit will spread with the basket raised to 1.5 high and 2.2 when in use, so when the basket is lowered.

The machine can tow up to 1200 kg total. Rexquote have developed a special lightsight for enhanced visibility designed to work with the Genie working in areas inaccessible.

Safety features include an Emergency Stop, Speed monitoring, slip alarm and automatic basket levelling.

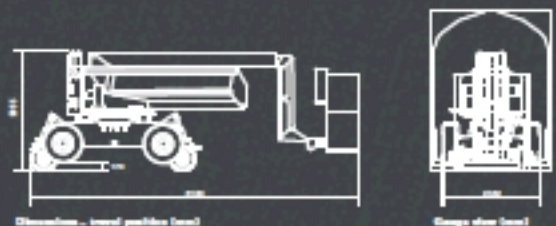
The machine is CE marked and has been independently tested and approved in EN300. It is fully compliant with EN15713 PCZ.

Genie Access Railer





REXQUOTE

Rexquote Genie Access Railer




(Dimensions - Internal platform frame)

(Range when down)



(Reach (m))



Specifications

Working height	22.5 m
Platform height	18.5 m
Working outreach	10.0 m
Platform capacity	225 kg
Platform size	3.0 m x 0.7 m
Platform area	2.10 m ²
Width	2.000 m
Height - on road wheels - platform raised	2.250 m
Height - on road wheels - platform down	2.700 m
Clearance height - platform raised	8.10 m
Weight	17 000 kg
Maximum forward speed	1.0 km/h
Max. road speed - platform raised or lowered	2.2 km/h
Maximum roll-over - travelling	300 mm (3°)
Maximum roll-over - working	300 mm (3°)
Maximum roll gradient	1 in 200
Maximum cross gradient	1 in 4
Minimum curve radius	30 m
Towing capacity	1200 kg
Ball wheel diameter	530 mm

REXQUOTE

Rexquote Limited, Development Business Park, Bishop-Cleeve Road, Doncaster, South Yorkshire DN1 1BB, UK
Tel: +44 (0)1522 432280 Fax: +44 (0)1522 432281 www.rexquote.co.uk info@rexquote.co.uk